


Aviation Refuelling

ATCOMEX
000 I ISO 9001



HYDRANT FLUSHING VEHICLE 20.000L

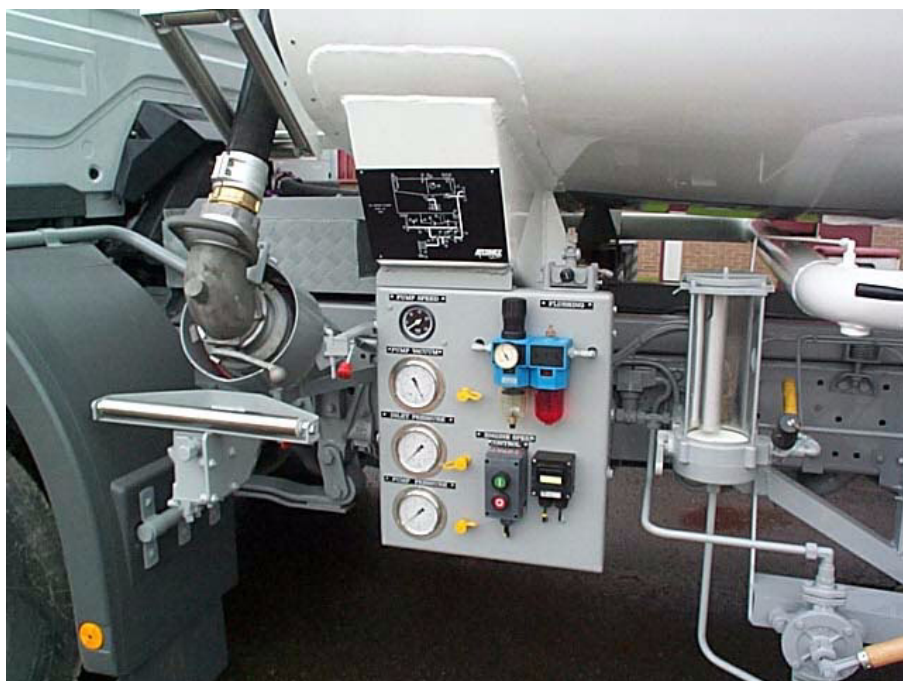

Atcomex Company nv

Nijverheidslaan 6
B-8560 Gullegem
Belgium
Tel. 32 56 43 99 20
Fax. 32 56 40 00 56
Email: atc.gullegem@atcomex.be
BTW/TVA BE 0425 920 763
RPR/RPM KORTRIJK

Atrefco nv Atcomex Hamme

Industriepark Zwaarveld 11
B-9220 Hamme
Belgium
Tel. 32 52 49 92 90
Fax. 32 52 47 84 32
Email: info.hamme@atcomex.be
BTW/TVA BE 0433 655 920
RPR/RPM DENDERMONDE

www.atcomex.be



TECHNICAL SPECIFICATIONS

- Tractor unit Scania P94 6x2 (other tractor makes available).
- Aluminium tank 20000L capacity
- Draining of the low points of the hydrant-piping network: 900lpm \pm 10%
- Venting of the high points of the hydrant-piping network: 900lpm \pm 10%
- Flushing and checking of the hydrant pit valves: min 1800lpm
- Loading of Jet A1 from a recovery tank: 120m³ph \pm 10%
- Emptying of isolated parts of the hydrant piping network: 200lpm \pm 10%
- Unloading of Jet A1 at Fuel Farm: min 120m³ph
- Overfill protection

SAFETY FEATURES

- Interlock system.
- Pneumatic operated handrails on top of tank or bi-line system.
- Wired to ADR standard
- Build to the latest CEN specifications.
- Conform to the stability regulation ECER111.