

Aviation Refuelling

ATCOMEX
000 I ISO 9001



SEMI-TRAILER LOW PROFILE 40.000L




Atcomex Company nv

Nijverheidslaan 6
B-8560 Gullegem
Belgium
Tel. 32 56 43 99 20
Fax. 32 56 40 00 56
Email: atc.gullegem@atcomex.be
BTW/TVA BE 0425 920 763
RPR/RPM KORTRIJK

Atrefco nv Atcomex Hamme

Industriepark Zwaarveld 11
B-9220 Hamme
Belgium
Tel. 32 52 49 92 90
Fax. 32 52 47 84 32
Email: info.hamme@atcomex.be
BTW/TVA BE 0433 655 920
RPR/RPM DENDERMONDE

www.atcomex.be

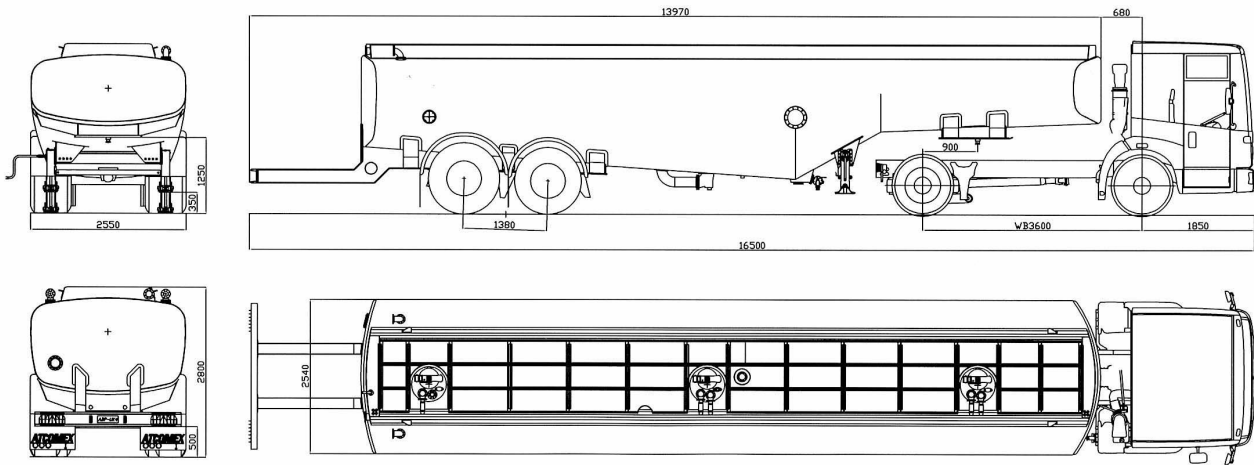

TECHNICAL SPECIFICATIONS

- Tractor unit Mercedes Econic 1829 Low entry with hydraulic drive (other tractor makes available).
- Trailer tank Aluminium 40000 litres capacity low profile with one rigid and one following axle. Height 2800mm.
- Hydraulic operated lifting platform with two deck hoses and underwing nozzle. Flow rate 2500 to 3000 lpm.
- One hose reel with underwing nozzle. Flow rate 1000 lpm.
- Primary and secondary overfill protection.
- Single HEPCV and inline pressure control valve.
- Defuelling possibility.
- Loading rate 2700 lpm.
- External suction.
- Hydraulic driven fuel pump.

SAFETY FEATURES

- Deadman control with timer function. With cable or wireless.
- Interlock system.
- Pneumatic operated handrails on top of tank or bi-line system.
- Wired to ADR standard.
- CE certified.
- Build to latest CEN specifications and conform to the latest JIG into plane specifications.
- Conform to the stability regulation ECER111.